



**Waiver:**

This data sheet is for guidance only and must not be used for proper working drawings. Please contact Stannah Lifts for particular details before proceeding. Owing to our policy of continual improvement we reserve the right to alter specifications and dimensions without prior notice.

For guidance only


# THE STANNAH STAIRISER CR

Curved Rail  
Wheelchair Platform Stairlift  
Rail & Platform Projections

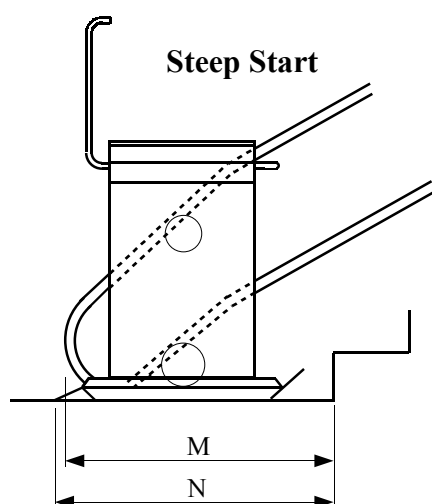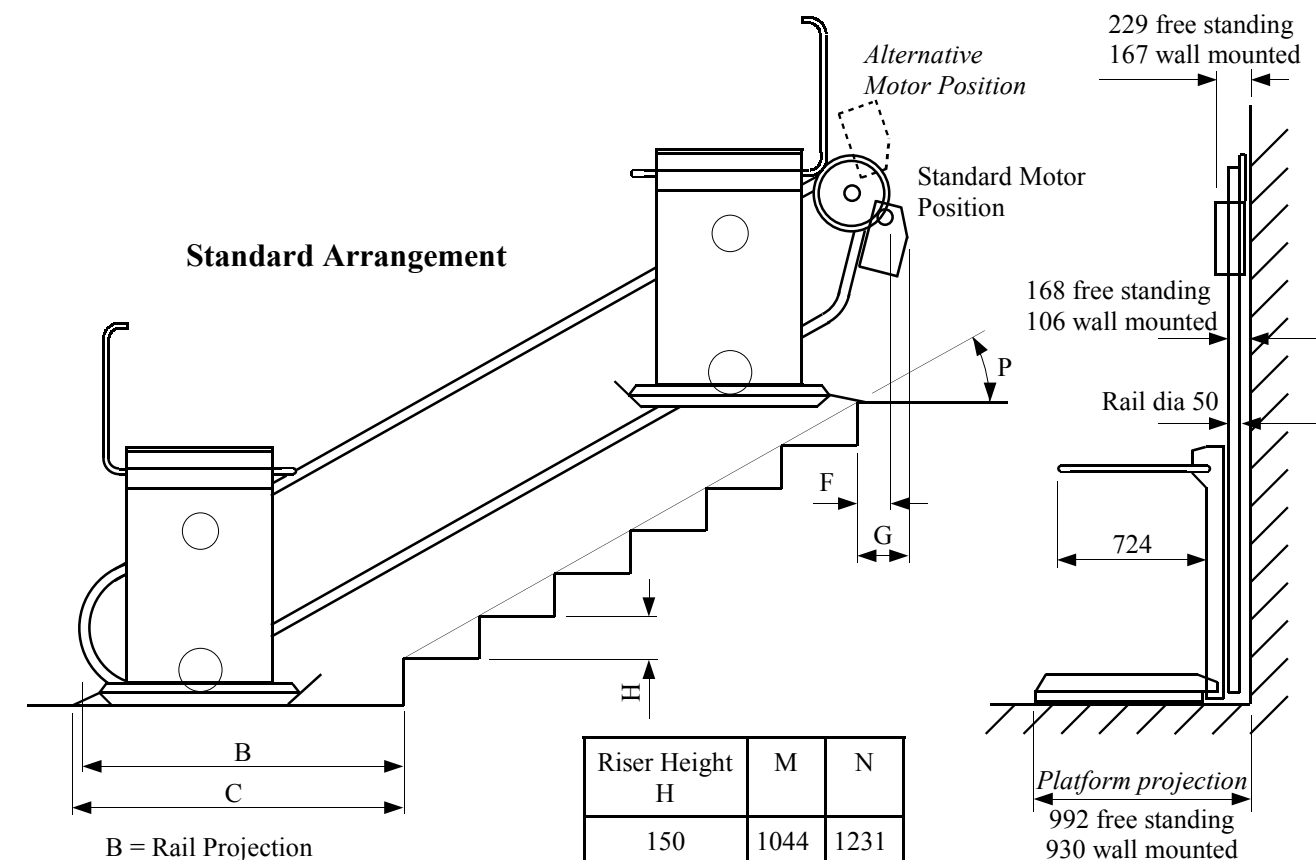

Stair Angle P	F	G	B	C
25°	234	399	1305	1441
30°	253	376	1249	1379
35°	212	361	1178	1340
40°	260	350	1130	1298
45°	310	338	1073	1260

## Gooseneck Drive

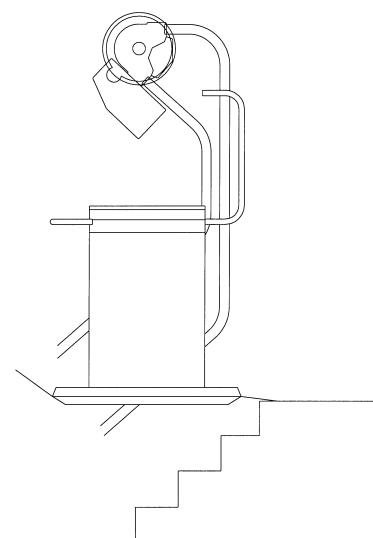

- All dimensions in mm.
- Dimensions C & N are applicable for the recommended end ramp length of 200mm; each measurement C & N is reduced by 50mm if 150mm ramps are specified.
- *Platform Projection* dimensions apply to conditions where there is no facing wall - see Information Sheet ACL 511 for clearances otherwise.
- *Steep Start* is useful when space at lower landing is restricted.
- *Alternative Motor Position* achieves reduced projection beyond top nose - dimension F shows applicable measurement.
- *Gooseneck* geometry achieves zero projection beyond top nose.
- Headroom clearances are an important consideration when assessing suitability of a platform stairlift - see Information Sheet ACL 514 for details.

**INFORMATION  
SHEET**  
**No. ACL 510**  
03.01.03