


Waiver:

This data sheet is for guidance only and must not be used for proper working drawings. Please contact Stannah Lifts for particular details before proceeding. Owing to our policy of continual improvement we reserve the right to alter specifications and dimensions without prior notice.

For guidance only

THE STANNAH STAIRISER SX

Straight Rail
Wheelchair Platform Stairlift 1050 x 810
Side Access

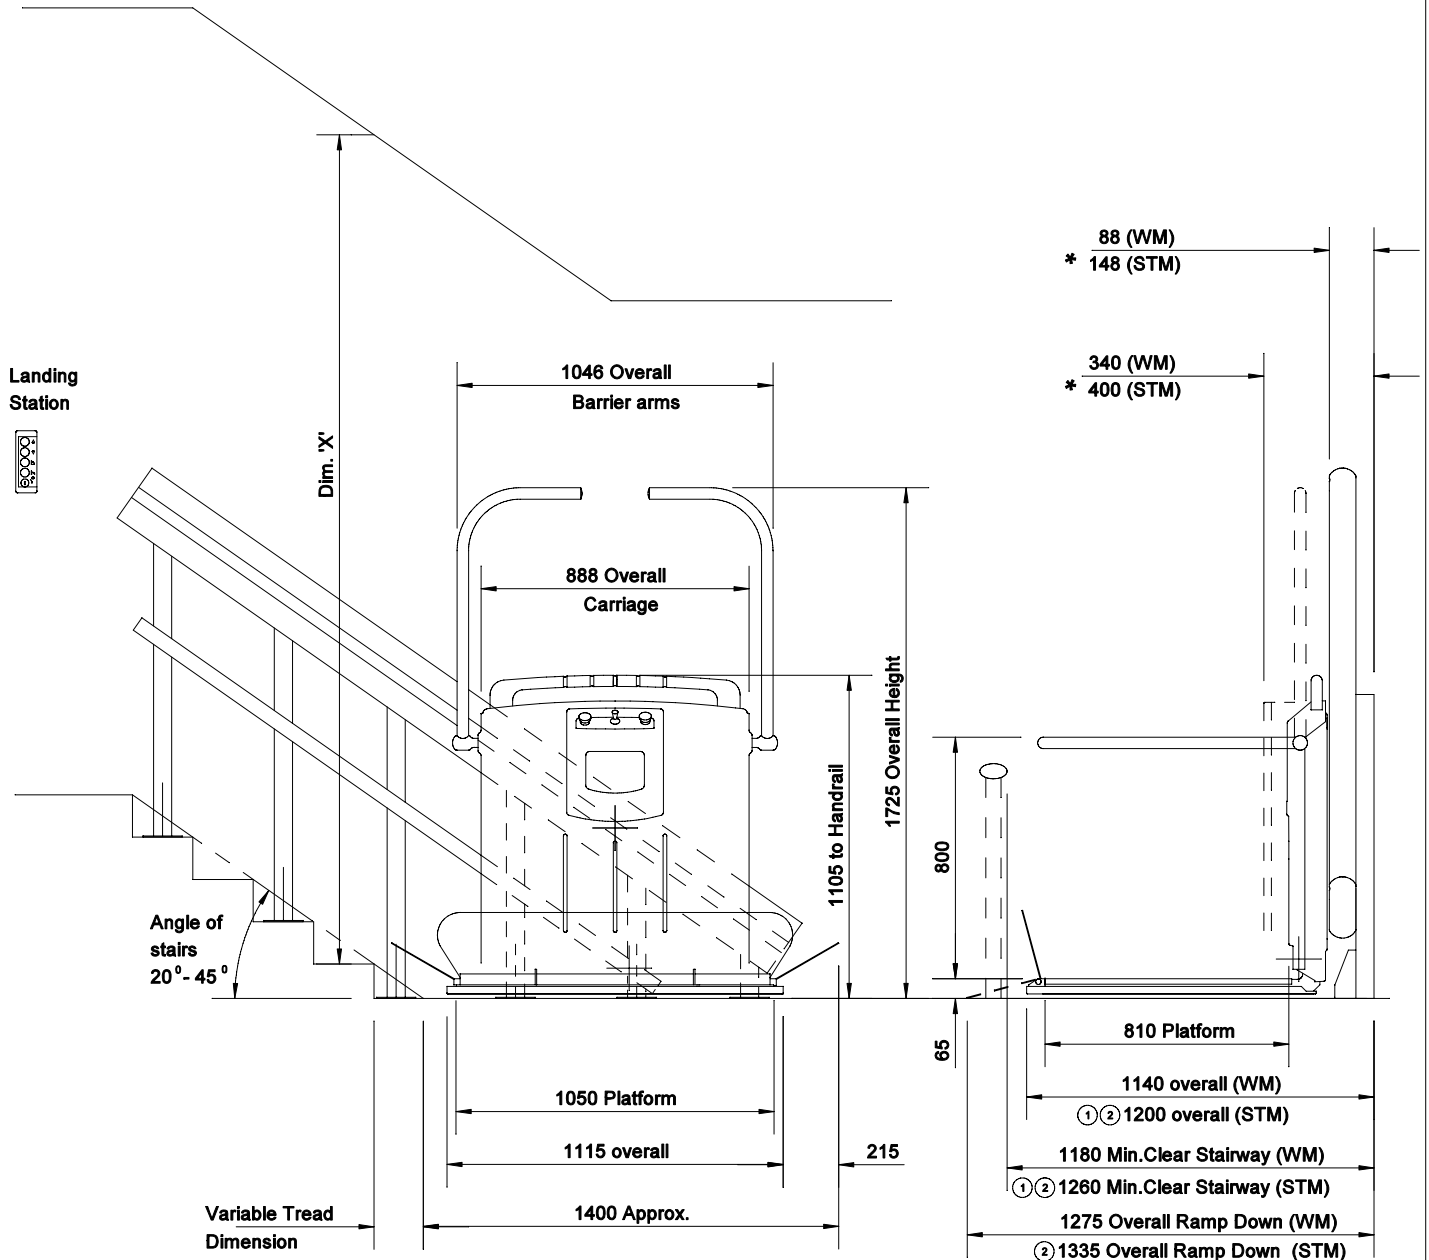

Minimum Headroom Required	
Angle of Stairs	Dim 'X'
20°	2117
25°	2224
30°	2342
35°	2476
40°	2629
45°	2810

Stairlift Specification Complies with the International Standard ISO 9386-2	
Rated load:	230Kg (36 stone).
Drive:	Rack & Pinion.
Speed:	0.1m/sec. Nominal.
Travel:	Up to 20 metres.
Angle of Stairs:	20° - 45° Maximum.
Site:	Straight stairs without intermediate landing. Interior & Exterior models available.
Fixing:	Wall mounted (WM) or Stair Tread Mounted (STM).
No. off stops:	2
Power supply:	Dedicated 240v single phase AC. 10amp fused spur.
Pit:	Not required.

WM = Wall Mounted

STM = Stair Tread Mounted (Support Stanchions)

NOTES:

- ① THESE CLEARANCE DIMENSIONS MUST BE INCREASED BY 160mm AT UPPER LANDING TO ALLOW PLATFORM TO BE FOLDED OR IF CLEARANCE IS NOT AVAILABLE THE PLATFORM IS ALLOWED TO FOLD AT THE LOWER LANDING ONLY.
- ② THESE DIMENSIONS DO NOT ALLOW FOR SKIRTING OR STAIR STRINGER THICKNESS.

INFORMATION SHEET
No. ASL 330
14.03.07