
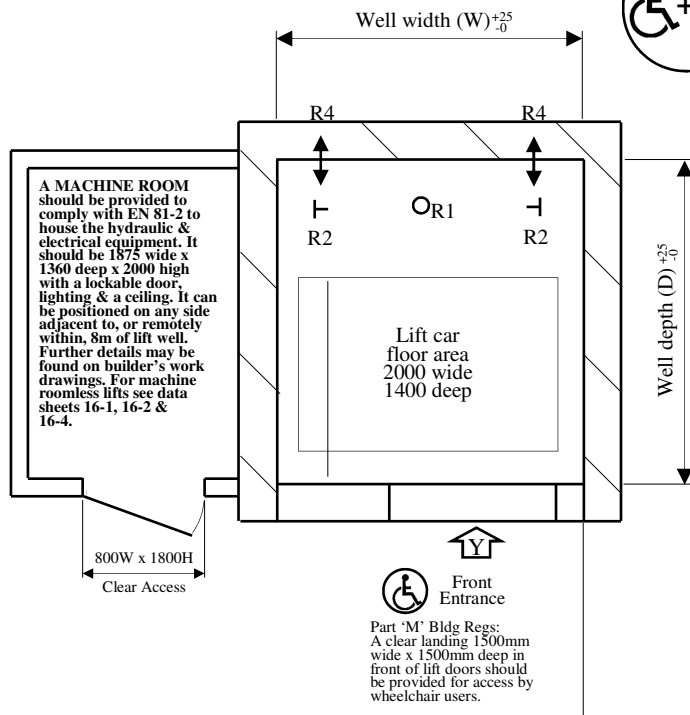


SYSTEM 21

16 Person (1200kg)

Waiver:
 This data sheet is for guidance only and must not be used for proper working drawings. Please contact Stannah Lifts for particular details before proceeding. Owing to our policy of continual improvement we reserve the right to alter specifications and dimensions without prior notice.

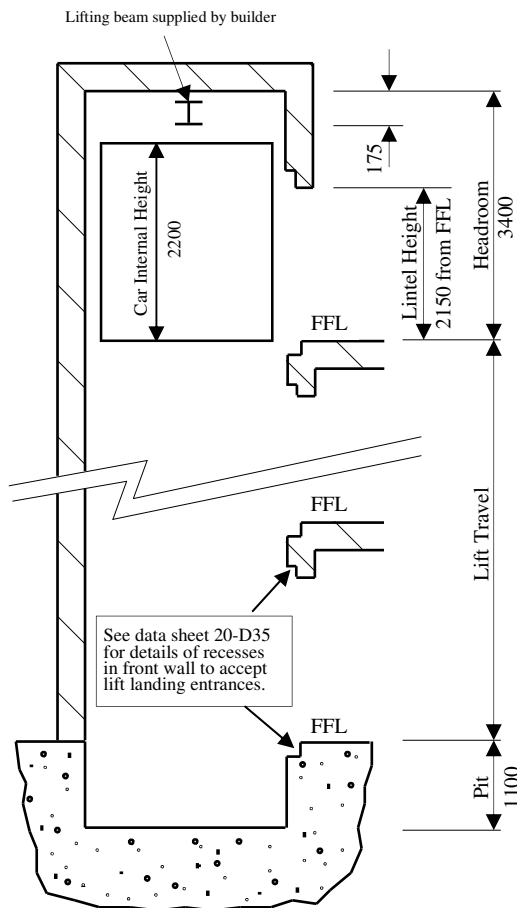

IMPORTANT
 On Wall Mounted Models, Unistrut inserts ref P3270 to be built into lift pit and lift well walls by builder *before* installation. See specific Builder's Work Drawings for precise details.

EQUIVALENT DEAD LOADS IMPOSED DUE TO LIFT OPERATION (kg)

		Wall Mounted Models	Type of Loading
Side Wall	Lift Pit Floor		
	R1	4929	Load due to car weight + load + hydraulic cylinder
	R2	4890	Load due to car buffering or safety gear operation
	R4	647	Push in/Pull out load

WALL MOUNTED MODELS

MODEL REF	LIFT DOORS ARRANGEMENT		Plan Well Dimensions Y Entrance		Lift Car Clear Entrance	
	Car Doors	Landing Doors	W	D	W	H
M16 - 2C - 2C	Auto 2 panel centre opening 2C	Auto 2 panel centre opening 2C	2400.0	2000.0	1100.0	2000.0

Note: Shaft sizes are for guidance purposes only and subject to change so it is crucial that you contact Stannah concerning your specific requirements.

Note: FX model (Structure Mounted) *not* available in this capacity. Wall Mounted only.

16-1
 16/08/07