


Waiver:

This data sheet is for guidance only and must not be used for proper working drawings. Please contact Stannah Lifts for particular details before proceeding. Owing to our policy of continual improvement we reserve the right to alter specifications and dimensions without prior notice.


SYSTEM 21



13 Person (1000kg) Square Shape

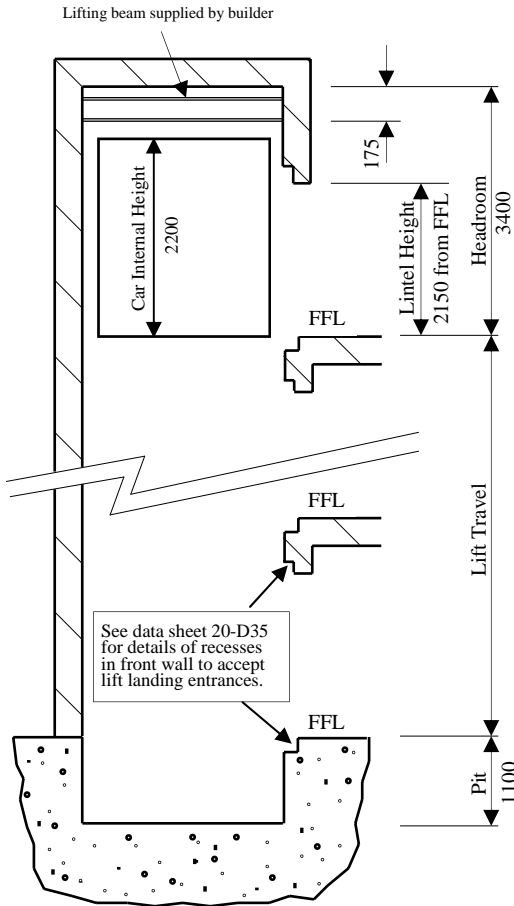

See data sheet 20-D35 for details of recesses in front wall to accept lift landing entrances.

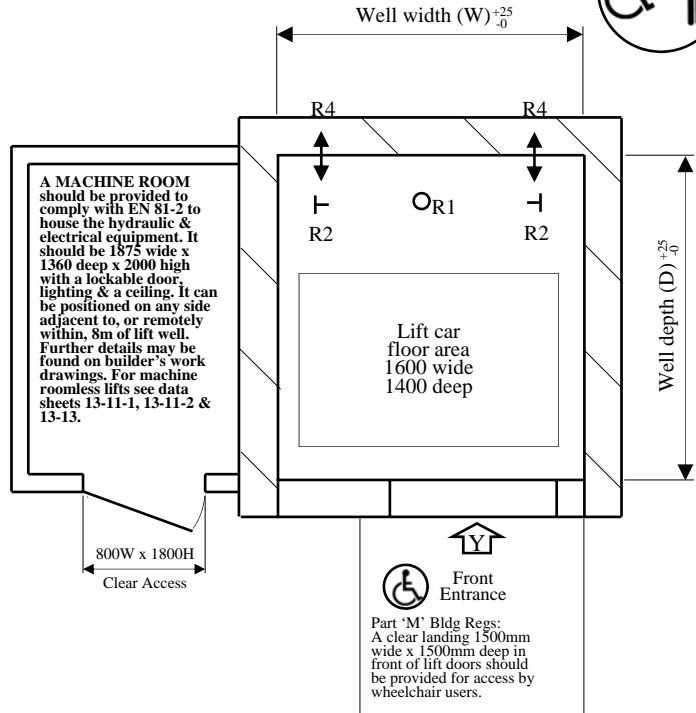

EQUIVALENT DEAD LOADS IMPOSED DUE TO LIFT OPERATION (kg)

		Wall Mounted Models	Type of Loading
Side Wall	R1	4416	Load due to car weight + load + hydraulic cylinder
	R2	4200	Load due to car buffering or safety gear operation
	R4	529	Push in/Pull out load

IMPORTANT

On Wall Mounted Models, Unistrut inserts ref P3270 to be built into lift pit and lift well walls by builder *before* installation. See specific Builder's Work Drawings for precise details.

WALL MOUNTED MODELS

MODEL REF	LIFT DOORS ARRANGEMENT		Plan Well Dimensions				Lift Car Clear Entrance	
			Front entrance X or Z		Front & rear entrance X & Z			
	Car Doors	Landing Doors	W	D	W	D	W	H
M13-2-2C 2C	Auto 2 panel centre opening 2C	Auto 2 panel centre opening 2C	2400	2050	Not Available	Not Available	1100	2000

Note: Shaft sizes are for guidance purposes only and subject to change so it is crucial that you contact Stannah concerning your specific requirements.

Note: FX model (Structure Mounted) *not* available in this capacity. Wall Mounted only.